



HIKVISION

DS-2CE16C0T-IT3F HD 720p EXIR Bullet Camera



Key Features

- 1 megapixel high-performance CMOS
- Analog HD output, up to 720p resolution
- Day/Night switch
- DNR
- Smart IR
- Up to 40 m IR distance
- Switchable TVI/AHD/CVI/CVBS
- IP66



www.hikvision.com


Specifications

| Camera | |
|----------------------|--|
| Image Sensor | 1 MP CMOS image sensor |
| Signal System | PAL/NTSC |
| Effective Pixels | 1296 (H) × 732 (V) |
| Min. illumination | 0.1 Lux@(F1.2,AGC ON),0 Lux with IR |
| Shutter Time | 1/25 (1/30) s to 1/50,000 s |
| Lens | 3.6 mm (2.8 mm, 6 mm, 8 mm, 12 mm, 16 mm optional) |
| | Field of view : 70.9° (3.6 mm), 92° (2.8 mm), 56.7° (6 mm), 38.6° (8 mm), 27.5° (12 mm), 17.7° (16 mm) |
| Lens Mount | M12 |
| Day & Night | ICR |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 180°, Rotation: 0° to 360° |
| Synchronization | Internal synchronization |
| Video Frame Rate | 720p@25fps/720p@30fps |
| HD Video Output | 1 analog HD output |
| S/N Ratio | >62dB |
| General | |
| Operating Conditions | -40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensation) |
| Power Supply | 12 V DC ± 15% |
| Power Consumption | Max. 4 W |
| Protection Level | IP66 |
| IR Range | Up to 40 m |
| Dimensions | 86.7 mm × 81.6 mm × 226 mm (3.4" × 3.2" × 8.9") |
| Weight | 700 g (1.54 lb.) |

Order Model

DS-2CE16C0T-IT3F

Dimensions

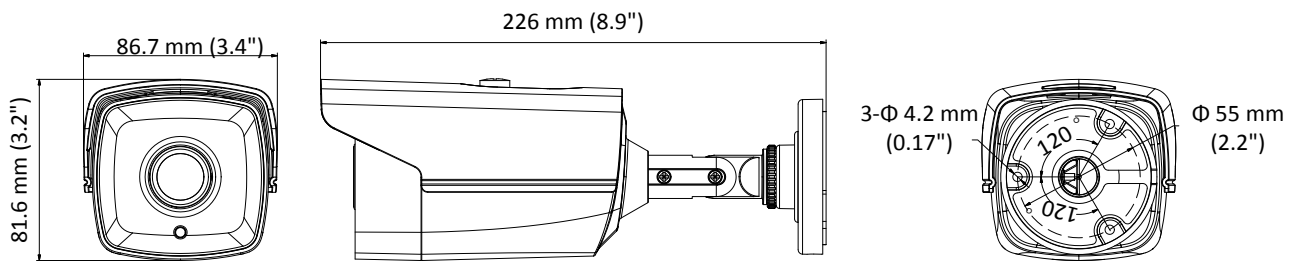

Accessories



DS-1280ZJ-XS
Junction Box



DS-1H18
Video Balun



X41T
Camera Tester

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Hong Kong
T +852-2151-1761