

## AE-DC5313-C6 Dashcam

### Key Features

- Up to 1600P high resolution, wide field angle up to 130°
- F1.6 super big aperture offer a perfect night image
- Support built-in MIC and speaker for audio in and out
- GPS and 4G module optional
- Display: 4 inches
- Built-in WIFI module and WIFI AP function supported
- Built-in G-Sensor module, support video recording linkage at car crash or strong vibration (Linkage video record can be configured be no-overwritten )
- SD card for video recording, up to 128GB (Overwriting supported )
- Phone App: live view, record playback and parameter configuration
- Voice control and ADAS function



### Available Model


AE-DC5313-C6/C6 PRO



## Specifications

|  |   |
|--|---|
| <b>Model</b>                                       | <b>AE-DC5313-C6</b>   |
| <b>Camera</b>                                      |   |
| <b>Image sensor</b>                                | CMOS  |
| <b>Resolution</b>                                  | 1600P@30fps,1600P@25fps、<br>1440P@30fps,1440P@25fps、<br>1080P@30fps,1080P@25fps |
| <b>Angle adjustment</b>                            | Diagonal: 130°; Horizontal: 106°  |
| <b>Aperture</b>                                    | F1.6  |
| <b>Display</b>                                     | 640*480   |
| <b>Video compression</b>                           | H.265   |
| <b>OSD</b>   | Display time, date, etc.  |
| <b>Image format</b>                                | JPEG  |
| <b>Storage</b>                                     | TF card, Max. 128 GB  |
| <b>Communication module</b>                        | Wi-Fi, 4G(Optional)   |
| <b>Sensor</b>                                      | G-sensor,GPS(Optional)  |
| <b>Interfaces</b>                                  |   |
| <b>Power supply</b>                                | USB 2.0   |
| <b>Audio input</b>                                 | MIC   |
| <b>Audio output</b>                                | Built-in Loudspeaker  |
| <b>General</b>                                     |   |
| <b>Working temperature</b>                         | -20 °C to 70 °C (-4 °F to 158 °F)   |
| <b>Working humidity</b>                            | 95%   |
| <b>Power supply</b>                                | 5 VDC, 1 A  |
| <b>Power consumption</b>                           | Max.3 W   |
| <b>Dimension (L x W x H)<br/>(without bracket)</b> | 90mm x 54 mm x 15.5 mm  |
| <b>Weight</b>                                      | 120 g   |

**Dimensions**

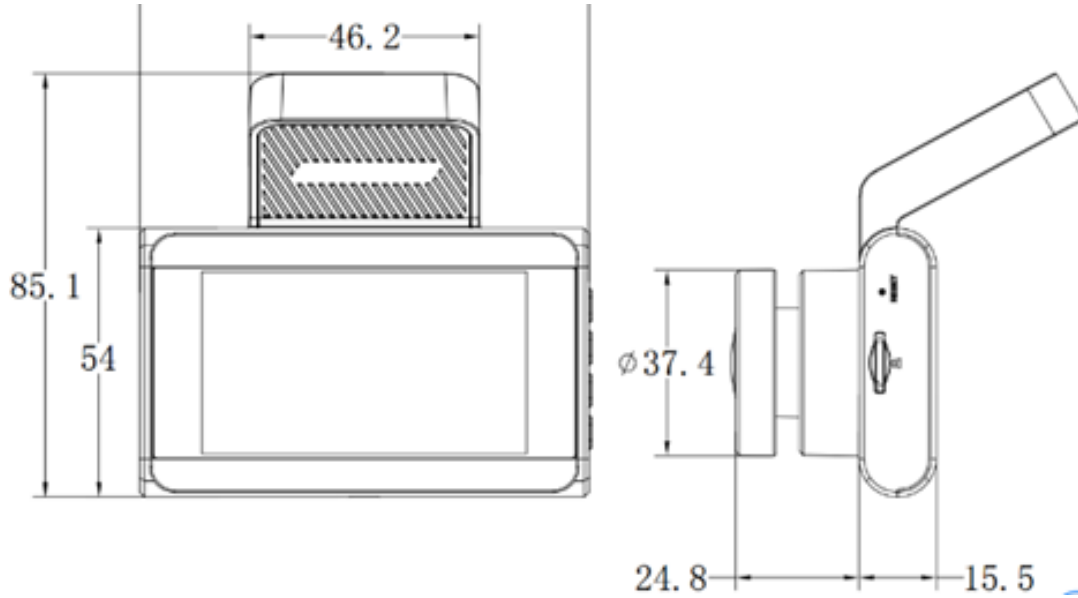

Distributed by



**HIKVISION®**

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

