



**HIKVISION**

**DS-2CE56C0T-IRMF**  
**HD 720p IR Turret Camera**



**Key Features**

- 1 megapixel high performance CMOS
- Analog HD output, up to 720p resolution
- Day/Night switch
- DNR
- Smart IR
- Up to 20 m IR distance
- Switchable TVI/AHD/CVI/CVBS
- IP66



[www.hikvision.com](http://www.hikvision.com)


## Specification

| <b>Camera</b>        |  |
|----------------------|--|
| Image Sensor         | 1 MP CMOS Image Sensor   |
| Signal System        | PAL/NTSC   |
| Effective Pixels     | 1296 (H) × 732 (V)   |
| Min. illumination    | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR                                       |
| Shutter Time         | 1/25 (1/30) s to 1/50,000 s  |
| Lens                 | 2.8 mm, 3.6 mm, 6 mm optional  |
|                      | Field of view: 70.9° (3.6 mm), 92° (2.8 mm), 56.7° (6 mm)                    |
| Lens Mount           | M12  |
| Day & Night          | ICR  |
| Angle Adjustment     | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°                       |
| Synchronization      | Internal synchronization   |
| Video Frame Rate     | 720p@25fps/720p@30fps  |
| HD Video Output      | 1 analog HD output   |
| S/N Ratio            | >62 dB   |
| <b>General</b>       |  |
| Operating Conditions | -40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensation) |
| Power Supply         | 12 V DC ± 15%  |
| Power Consumption    | Max. 4 W   |
| Protection Level     | IP66   |
| IR Range             | Up to 20 m   |
| Dimensions           | 89.47 × 67.6 mm (3.52" × 2.7")   |
| Weight               | 340 g (0.75 lb.)   |

## Order Model

DS-2CE56C0T-IRMF

## Dimensions

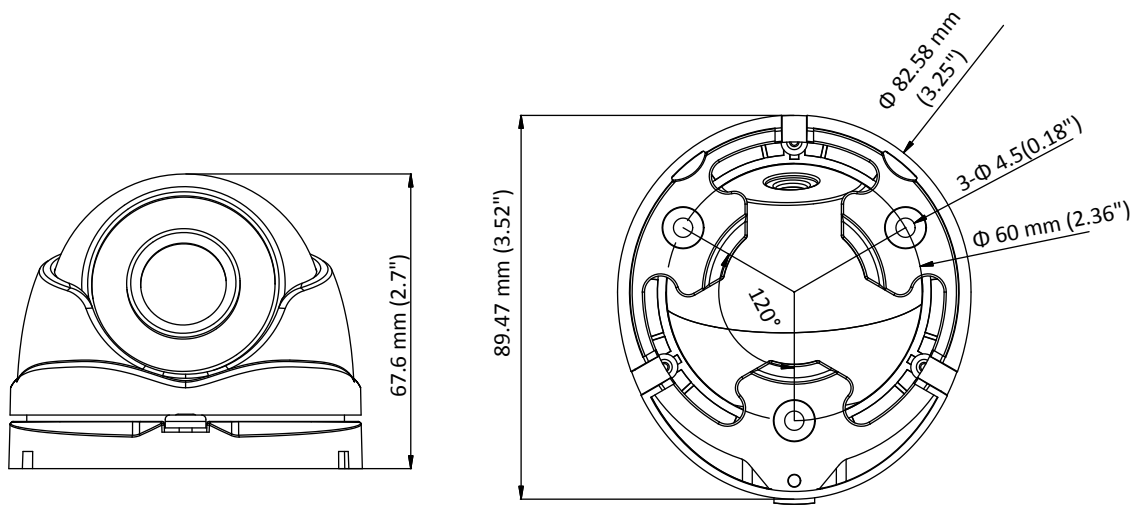

## Accessories



DS-1272ZJ-110-TRS  
Wall Mounting Bracket



DS-1275ZJ-SUS  
Vertical Pole Mounting Bracket



DS-1276ZJ-SUS  
Corner Mounting Bracket



DS-1H18  
Video Balun



X41T  
Distributed by  
Camera Tester



DS-1280ZJ-XS  
Junction Bo



**Headquarters**  
No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5999  
overseasbusiness@hikvision.com

Hikvision USA  
T +1-909-895-0400  
sales.usa@hikvision.com

Hikvision Italy  
T +39-0438-6902  
info.it@hikvision.com

Hikvision Singapore  
T +65-6684-4718  
sg@hikvision.com

Hikvision Europe  
T +31-23-5542770  
saleseuro@hikvision.com

Hikvision France  
T +33(0)1-85-330-444  
info.fr@hikvision.com

Hikvision Oceania  
T +61-2-8599-4233  
salesau@hikvision.com

Hikvision Middle East  
T +971-4-8816086  
salesme@hikvision.com

Hikvision Spain  
T +34-91-737-16-55  
info.es@hikvision.com

Hikvision Hong Kong  
T +852-2151-1781

Hikvision Russia  
T +7-495-669-67-99  
saleru@hikvision.com

Hikvision Poland  
T +48-22-460-01-50  
poland@hikvision.com

Hikvision Canada  
T +1-909-895-0400  
sales.usa@hikvision.com

Hikvision India  
T +91-22-28469900  
sales@pramahikvision.com

Hikvision UK  
T +44-1628-9021-4  
support.uk@hikvision.com